

# DuraGloss 30+™

Penetrating Lithium Industrial Seal Coat  
INTERIOR USE • SATIN SHEEN • 72-HOUR CURE TIME



383 Canterbury Road Surrey Hills 3127

TEL: 61 3 9836 4488

SALES / TECH SUPPORT: 0411 248 486

[www.sealsourceaustralia.com](http://www.sealsourceaustralia.com)

LEED® EQ Credit 4.1: Low-Emitting Materials: Adhesives & Sealants

## TECHNICAL DATA SHEET

### PRODUCT DESCRIPTION

**DuraGloss 30+™** is a satin finish material that provides superior resistance to stains, water, oil, dusting, and abrasion. This lithium-based product has a deep, rich, satin sheen that enhances the natural look of concrete and intensifies the color of an acid-stained or integrally-pigmented floor. **DuraGloss 30+™** outlasts any other product of its kind—which combined with its aesthetic value makes it an excellent treatment for both industrial and retail applications.


The innovative technology of **DuraGloss 30+™** eliminates the need to apply an acrylic sealer or wax to achieve gloss and stain resistance--dramatically reducing maintenance costs and facility downtime. When applied to surfaces that have been treated with **Harden X™** as recommended, performance of the **DuraGloss 30+™** system is unmatched in the industry.

### USES

**DuraGloss 30+™** is designed for interior use in a variety of industrial and commercial spaces where a satin sheen is desired and there is sufficient down time available to accommodate the 72-hour cure period. Such applications may include warehouses, manufacturing facilities, restaurants, shopping centers, retail/grocery stores, hotels, office buildings, sports & entertainment venues, transportation terminals, schools, parking garages, distribution centers, showrooms, and convention centers.

### ADVANTAGES

- Satin Finish
- Durable
- Odorless
- Light Reflective
- Increases resistance to stains, water, oil, dusting, and abrasion
- Dramatically reduces maintenance costs and facility downtime
- Exceeds OSHA and ADA coefficient

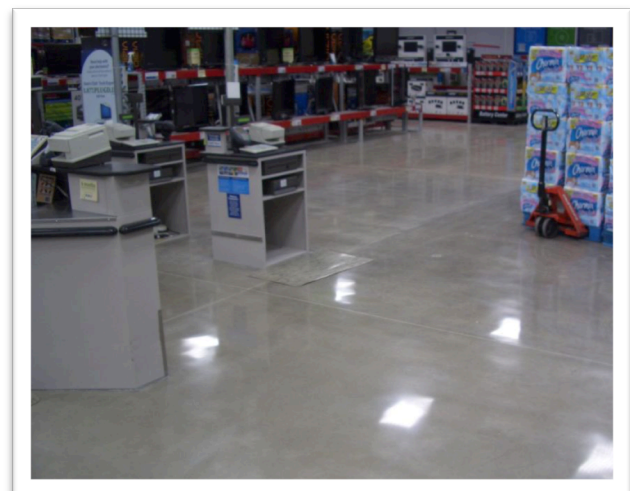

of friction

- Won't peel, flake, or yellow
- Environmentally Safe
- No stripping and disposing of material before application

## PHYSICAL PROPERTIES

Form:	Milky white, aqueous solution
Total Solids:	23%
Active Ingredients:	100% of total solids
Specific Gravity:	1.09
pH Level:	11.5
Flash Point:	N/A
VOC Content:	< 50 gms/liter
Freeze Point:	32 ° F (0 ° C)
Abrasion Resistance:	Excellent
Depth of surface penetration:	2-8 mm

## PACKAGING

- 55 Gallon Drums (drum containers filled by weight, volume is closely approximate)
- 5 Gallon Pails

## MIXING

DuraGloss 30+™ is a single component product. Shake or stir for 1-2 minutes prior to use.

## APPLICATION METHOD/COVERAGE RATE

Please see separate application instruction document for complete application information.

DuraGloss 30+™ should be applied in two coats (minimum) by a low pressure sprayer or airless sprayer at approximately 50 m<sup>2</sup>/liter (1,500 sq.ft./gallon) and must be pulled out using a polyester micro-fiber applicator. Allow dry time of 1 hour between coats and 72 hours to cure.

## SHELF LIFE

DuraGloss 30+™ may be stored for up to six months in original, unopened factory containers under normal storage conditions of 13° – 35° C (55°-95° F).

## SAFETY

- Read Material Safety Data Sheet before using
- Keep out of reach of children
- Protect from freezing
- Wear safety glasses and rubber gloves
- Do not apply to soft metals
- Do not apply to glass

## **WARRANTY**

SealSource® International LLC, will refund the price of or replace, at its election, product it finds to be defective provided the product has been used properly. Except as expressly stated above, the Company makes no warranty of merchantability and no warranty of fitness for any particular purpose, nor does it make any warranty, expressed or implied, of any nature whatsoever with respect to the product or its use. In no event shall the company be liable for delay caused by defects, for loss of use, for indirect, special or consequential damages, or for any charges or expenses of any nature incurred without its written consent.